


Rubber Grip Pads for Grippers


Increased gripping friction. Protection for delicate parts.

These Grip Pads, made of perbunan bound on an aluminum plate, can be cut, bent, and drilled to conform with the shape of the part to be handled.

This is the ideal material for gripper pads when increased friction is necessary or when the surface of the part needs to be protected. We use a proprietary process for bonding the perbunan to the aluminum that produces a high quality product which will not separate under stress.

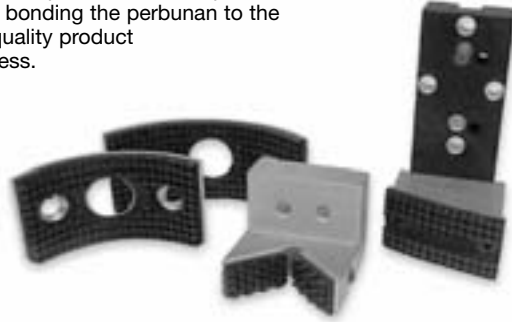

Coarse Surface

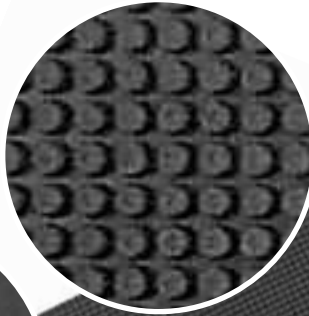

Smooth Surface



HK-A2-S

Temperature Resistance:.....	8°-112° F	25°-80° C
Shore Hardness:.....	73	73
Coefficient of Friction for Steel (dry):	0.5	0.5
Size (Length):.....	9.44 in	240 mm
Size (Width):.....	5.51 in	140 mm

See page 2.11.1

HK-A2-C

Temperature Resistance:.....	8°-112° F	25°-80° C
Shore Hardness:.....	73	73
Coefficient of Friction for Steel (dry):	0.5	0.5
Size (Length):.....	9.44 in	240 mm
Size (Width):.....	5.51 in	140 mm

See page 2.11.1

HK-A3-S

Temperature Resistance:.....	8°-112° F	25°-80° C
Shore Hardness:.....	73	73
Coefficient of Friction for Steel (dry):	0.5	0.5
Size (Length):.....	9.44 in	240 mm
Size (Width):.....	5.51 in	140 mm


See page 2.11.1

HK-A3-C



Temperature Resistance:.....	8°-112° F	25°-80° C
Shore Hardness:.....	73	73
Coefficient of Friction for Steel (dry):	0.5	0.5
Size (Length):.....	9.44 in	240 mm
Size (Width):.....	5.51 in	140 mm

See page 2.11.1

HK-A2, HK-A3 Rubber Grip Pads

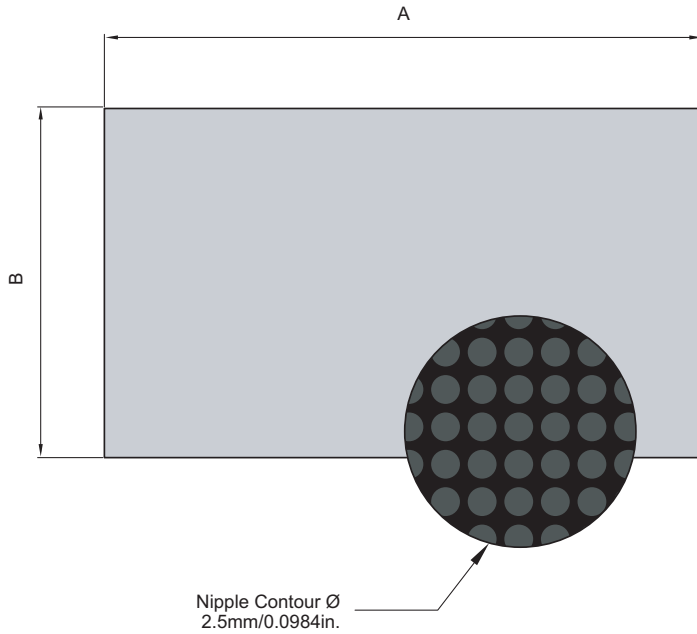

Specifications:	Imperial	Metric
Temperature Resistance:	8°-112° F	25°-80° C
Shore Hardness:	73	73
Coefficient of Friction for Steel (dry):	0.5	0.5
Material:	Perbunan	
Resistance:	Oil, Acid, Coolant	

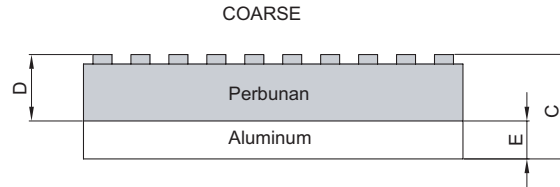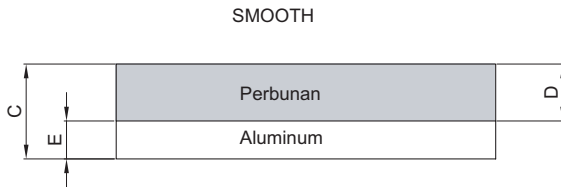

Part #	Style	A		B		C		D		E	
		Imperial	Metric	Imperial	Metric	Imperial	Metric	Imperial	Metric	Imperial	Metric
HK-A2-S	Smooth Surface	9.44 in	240 mm	5.51 in	140 mm	0.21 in	5.5 mm	0.18 in	3.5 mm	0.08 in	2 mm
HK-A2-C	Coarse Surface	9.44 in	240 mm	5.51 in	140 mm	0.21 in	5.5 mm	0.18 in	3.5 mm	0.08 in	2 mm
HK-A3-S	Smooth Surface	9.44 in	240 mm	5.51 in	140 mm	0.28 in	7 mm	0.24 in	4 mm	0.12 in	3 mm
HK-A3-C	Coarse Surface	9.44 in	240 mm	5.51 in	140 mm	0.28 in	7 mm	0.24 in	4 mm	0.12 in	3 mm

Ordering Information:

HK-A2-S or **C**

HK-A3-S or **C**

Available Option Descriptions:

- Smooth Surface -S
- Coarse Surface -C